
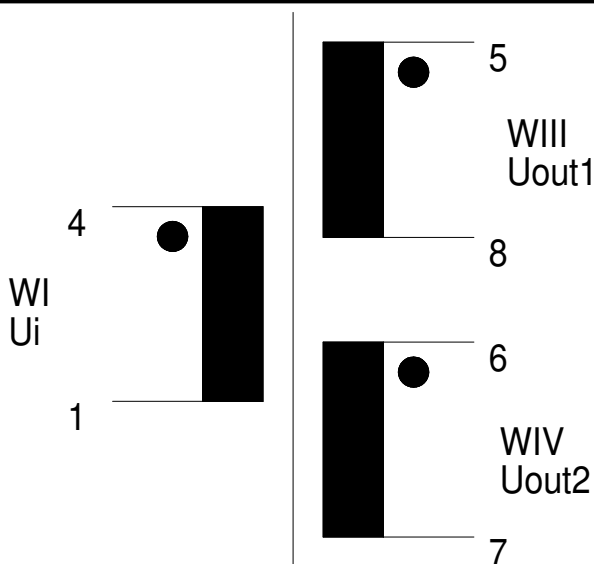


Technical Data Sheet

Customer:
Kaschke Göttingen

Part designation:
SP-E 16/5

Customer part no.:
SKNY253-9-1.5

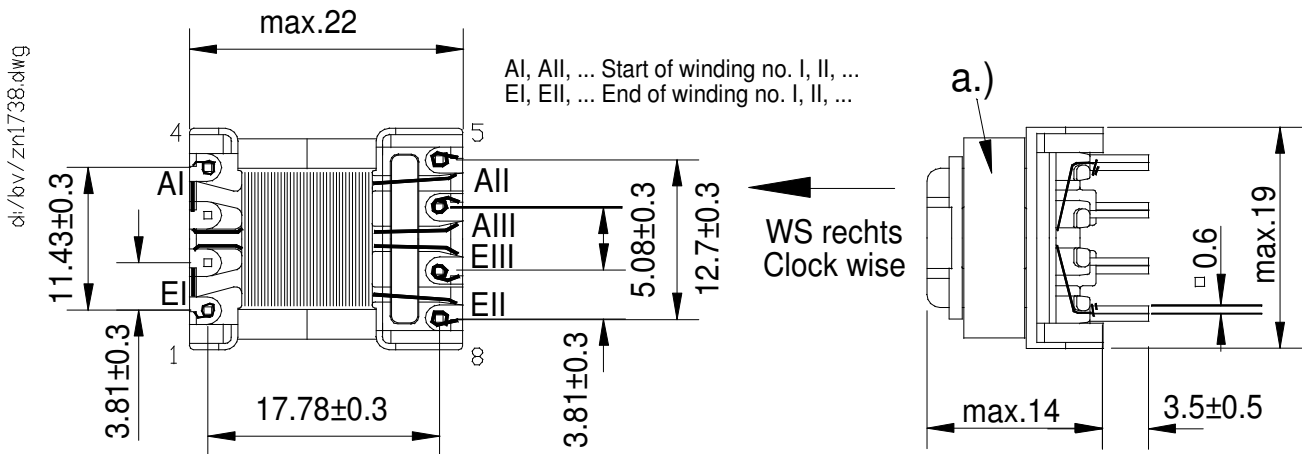

Core / material / air gap / AL	E 16/5 K2006 or equiv	
Nominal inductance	LI = 5,67mH ± 10%	
maximum transmissible power	1,5W	
Working frequency	44 - 132 kHz	
Transformation ratio	215 : 21 : 21	
dielectric strength (50Hz/2s)	Prim-Sec = 4kV/50Hz/2sec.	
Nominal Current		
Design in comp. with standard	EN60950/EN61558	
Working / storage temperature	-25°C- +85°C	-25°C- +115°C
Miscellaneous	F (DIN 40040)	
leakage inductance	max. 200µH	

Remarks : a.) marking
Out1 = Out2 = 6-9V/0,1A

Measuring device of L: **PMA3260**

Measuring conditions of L: **50mV/10kHz/22,5°C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person:

Uwe Dickhut

Date:

17.02.2011

Design regulation no:

063.928

Index:

00

PLEASE GIVE US YOUR WRITTEN RELEASE

Date

Signature