


Magn. Formkenngrößen/Satz
eff. magn. parameters/set

| | | |
|---|-------------|-----------------------|
| Formfaktor <i>core factor</i> | $C_1 =$ | 0,27 mm ⁻¹ |
| Eff. magn. Weglänge <i>eff. magn. path length</i> | $l_e =$ | 61,6 mm |
| Eff. magn. Querschnitt <i>eff. magn. cross section</i> | $A_e =$ | 225 mm ² |
| Min. magn. Querschnitt <i>min. magn. cross section</i> | $A_{min} =$ | 215 mm ² |
| Eff. magn. Volumen <i>eff. magn. volume</i> | $V_e =$ | 13800 mm ³ |
| Gewicht/Stück <i>weight/part</i> | $G \approx$ | 35 g |

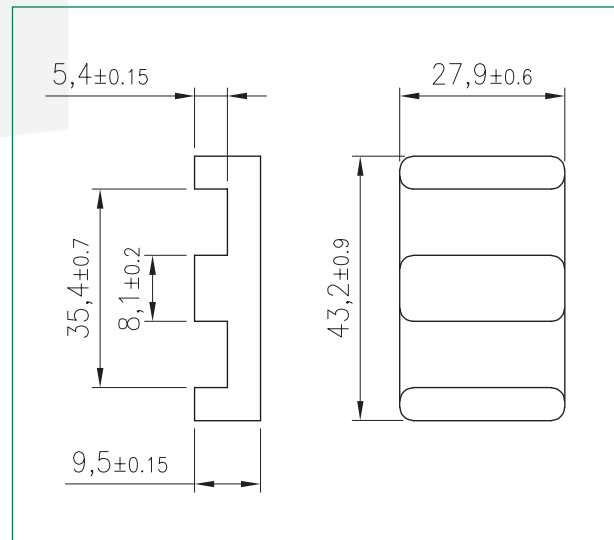

| Werkstoff <i>material</i> | A_L -Wert A_L value nH | Toleranz <i>tolerance</i> | Luftspalt <i>airgap</i> mm | μ_e | Bestellnummer <i>order number</i> |
|------------------------------|----------------------------------|------------------------------|----------------------------------|---------|--------------------------------------|
| K 2001 | 6000 | ± 25% | - | ≈ 1280 | 382 439501 221 |
| K 2008 | 8550 | ± 25% | - | ≈ 1820 | 382 439501 028 |
| K 2010 | 8550 | ± 25% | - | ≈ 1820 | 382 439501 022 |

Bei Anwendung in Leistungsübertragern
for application in power transformers

| Werkstoff <i>material</i> | Messbedingungen <i>test conditions</i> | Verluste/Satz <i>losses/set</i> |
|------------------------------|---|------------------------------------|
| K 2001 | 500kHz, 50mT, 100°C | ≤ 2,3 W |
| K 2008 | 100kHz, 200mT, 100°C | ≤ 7,0 W |
| K 2010 | 100kHz, 200mT, 100°C | ≤ 6,0 W |

gemessen an zwei PE-Kernen / measured on a set of two PE cores

All information given without liability. If you require further information about our products, do not hesitate to contact our representatives, or visit our homepage, www.kaschke.de.

Kaschke Components GmbH

Rudolf-Winkel-Straße 6 · 37079 Göttingen · Germany
Fon +49 (0) 5 51-50 58-6 · Fax +49 (0) 5 51-65 75 6
kaschke.de