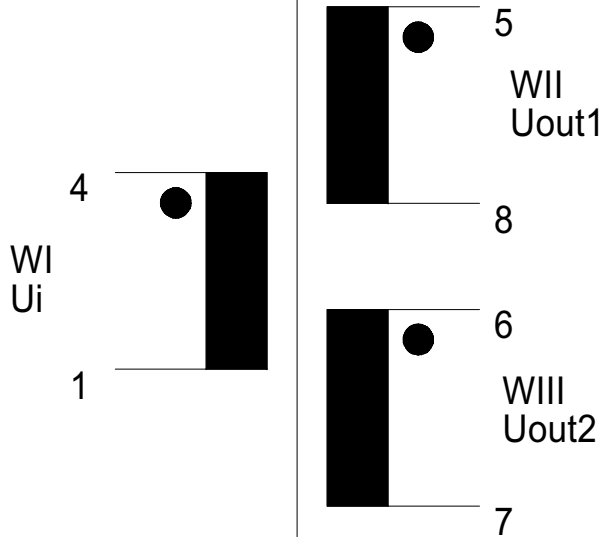
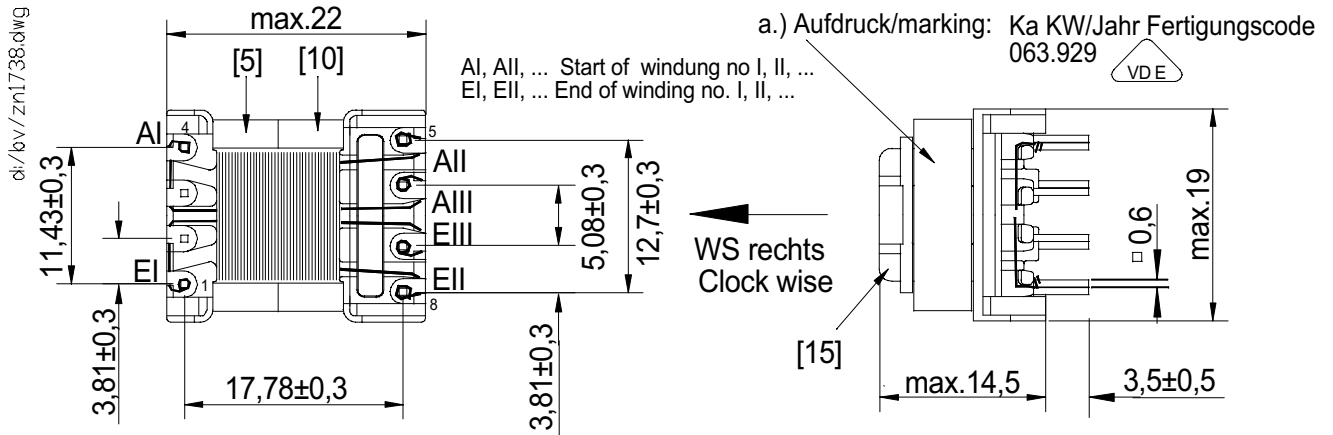


Technical Data Sheet

 Customer:
Kaschke Göttingen

 Part designation:
SP-E 16/5

 Customer part no.:
SKNY254-5-3


Core / material / air gap / AL	E16/5 K2006 or equiv.	
Nominal inductance	LI= 3,9mH ±10%	
maximum transmissible power	3W	
Working frequency	44 - 132 kHz	
Transformation ratio	242 : 13 : 13	
dielectric strength (50Hz/2s)	Prim-Sec = 4kV/50Hz/2sec.	
Nominal Current		
Design in comp. with standard	EN60950 / EN61558	
Working / storage temperature	-25°C- +120°C	-25°C- +85°C
Miscellaneous	F (DIN 40040)	
leakage inductance	max. 200 µH	

Remarks : a.) marking

 Measuring device of L: **W&K 3260A**

 Measuring conditions of L: **50mV/10kHz/22,5°C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

 Responsible person:
Uwe Dickhut

 Date:
18.12.2006

 Design regulation no.:
063.929

 Index:
01
PLEASE GIVE US YOUR WRITTEN RELEASE

Date

Signature