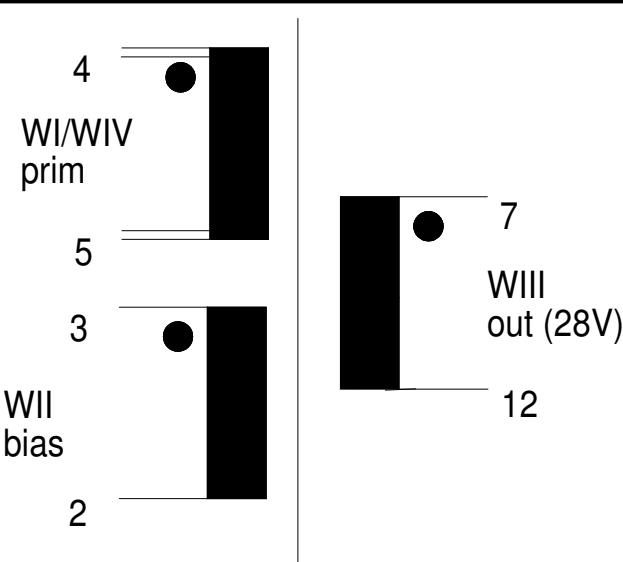
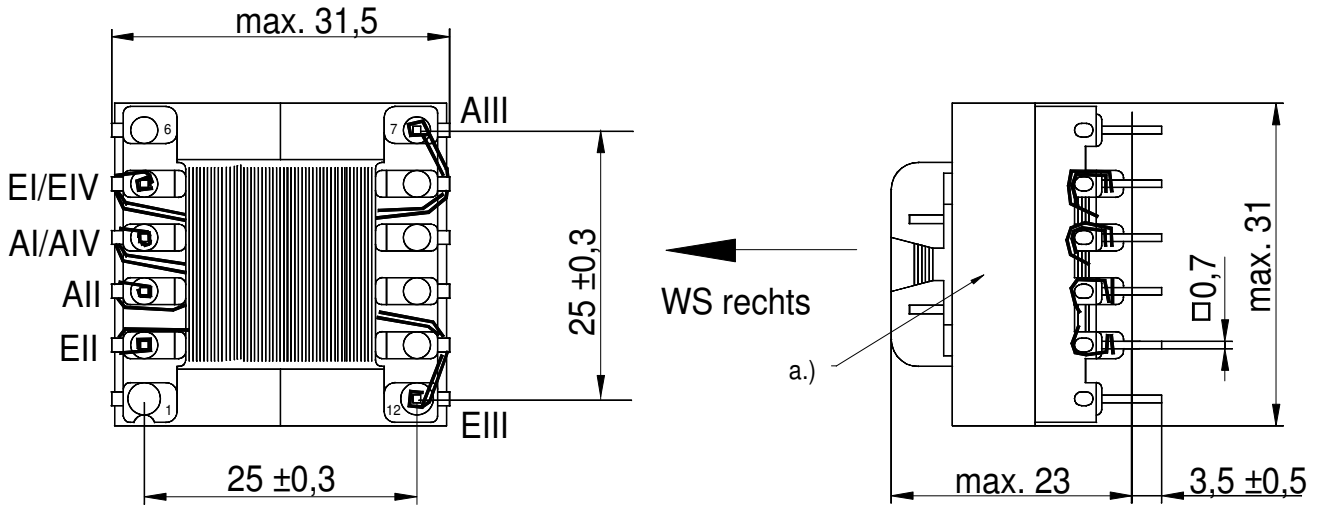


# Technical Data Sheet

 Customer:  
**Kaschke Göttingen**

 Part designation:  
**SP-E 30/7**

 Customer part no.:  
**SKOP246-28-58**


Core / material / air gap / AL	<b>E30/7 / K2006 or equiv.</b>	
Nominal inductance	<b>LI= 290 µH ±10%</b>	
maximum transmissible power	<b>56 W</b>	
Working frequency	<b>132 kHz</b>	
Transformation ratio	<b>44:6:12:44</b>	
dielctric strength (50Hz/2s)	<b>Prim-Sec = 3,75kV/50Hz/1sec</b>	
Nominal Current		
Design in comp. with standard	.	
Working / storage temperature	<b>-25 °C- +115 °C</b>	<b>-25 °C- +85 °C</b>
Miscellaneous	<b>F (DIN 40040)</b>	
leakage inductance	<b>max. 8µH</b>	

 Remarks : **a.) marking**  
**- parallel split primary**

 Measuring device of L: **W&K 3260A**

 Measuring conditions of L: **50mV/10kHz/25 °C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

 Responsible person:  
**Uwe Dickhut**

 Date:  
**24.08.2006**

 Design regulation no.:  
**066.931**

 Index:  
**00**
**PLEASE GIVE US YOUR WRITTEN RELEASE**


Date

Signature