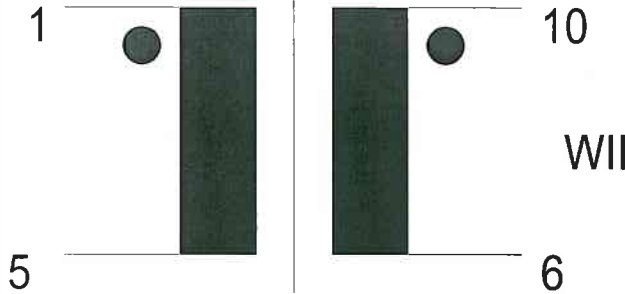
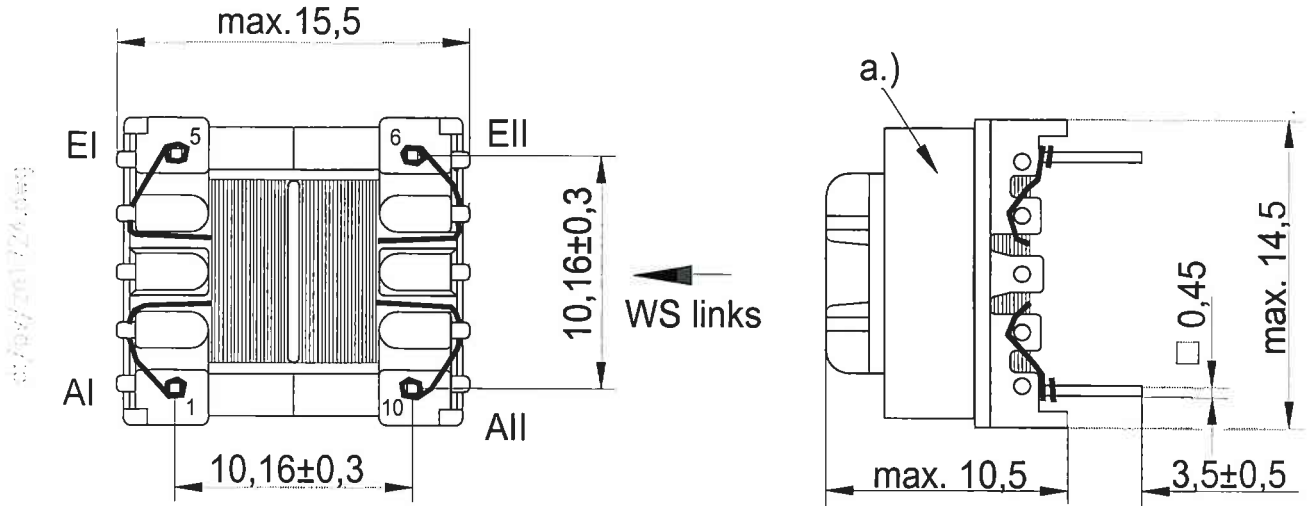


Technical Data Sheet

 Customer:
Kaschke Göttingen

 Part designation:
SP-E 13/4

 Customer part no.:
Type


Core / material / air gap / AL	E13/4 K4000 or equiv.	
Nominal inductance	L= 2 x 12mH ±30%	
maximum transmissible power		
Working frequency		
Transformation ratio	1:1	
dielectric strength (50Hz/2s)	Prim-Sec = 0,5kV/50Hz/2sec	
Nominal Current	0,54A	
Design in comp. with standard	S96	
Working / storage temperature	-25°C- +125°C	-25°C- +85°C
Miscellaneous	F (DIN 40040)	
R DC	max. 1,6 Ohm	

 Remarks : **a.) marking**

 Measuring device of L: **W&K 3260A**

 Measuring conditions of L: **50mV/10kHz/22,5°C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person: Uwe Dickhut	Date: 01.03.2007	Design regulation no.: 071.921	Index: 01
---	----------------------------	--	---------------------

PLEASE GIVE US YOUR WRITTEN RELEASE

Date Signature