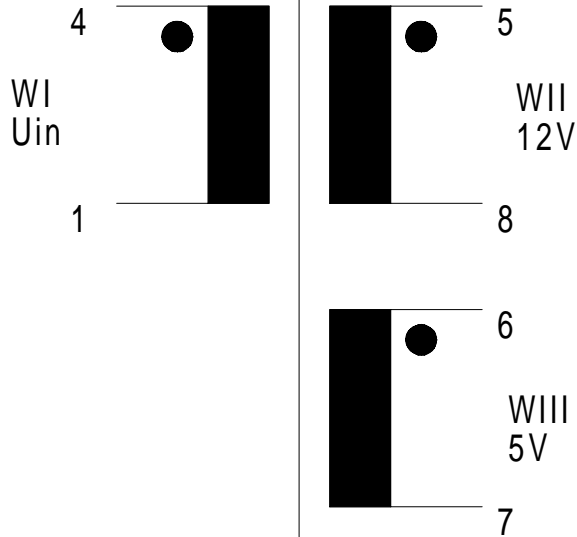
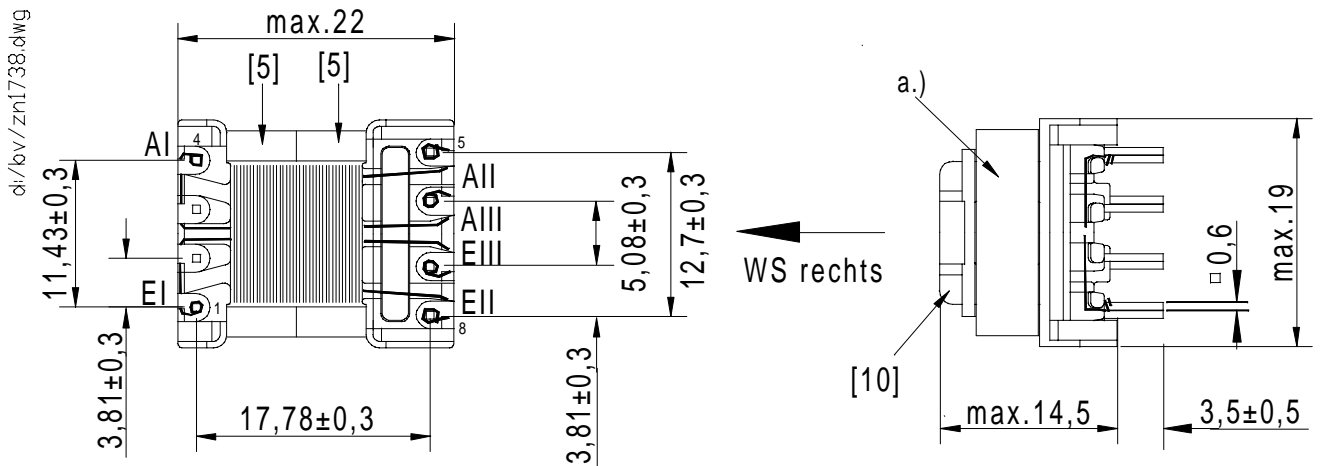


Technical Data Sheet

 Customer:
Kaschke Göttingen

 Part designation:
SP-E 16/5

 Customer part no.:
SKNY264-5-12-5


Core / material / air gap / AL	E16/5 K2006 or equiv.	
Nominal inductance	LI= 2,55mH ±15%	
maximum transmissible power	9W(TNY267/277-uni)	
Working frequency	44 - 132 kHz	
Transformation ratio	127 : 14 : 6	
dielectric strength (50Hz/2s)	Prim-Sec = 4kV/50Hz/2sec	
Nominal Current		
Design in comp. with standard	EN60950 / EN61558	
Working / storage temperature	-25°C- +120°C	-25°C- +85°C
Miscellaneous	F (DIN 40040)	
leakage inductance	max. 60 µH	

Remarks : a.) marking

 Measuring device of L: **W&K 3260A**

 Measuring conditions of L: **50mV/10kHz/22,5°C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

 Responsible person:
Uwe Dickhut

 Date:
18.12.2006

 Design regulation no.:
093.203

 Index:
01

PLEASE GIVE US YOUR WRITTEN RELEASE

Date Signature