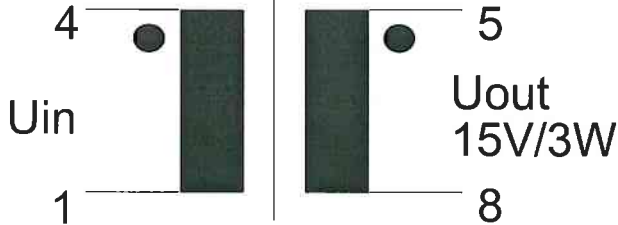
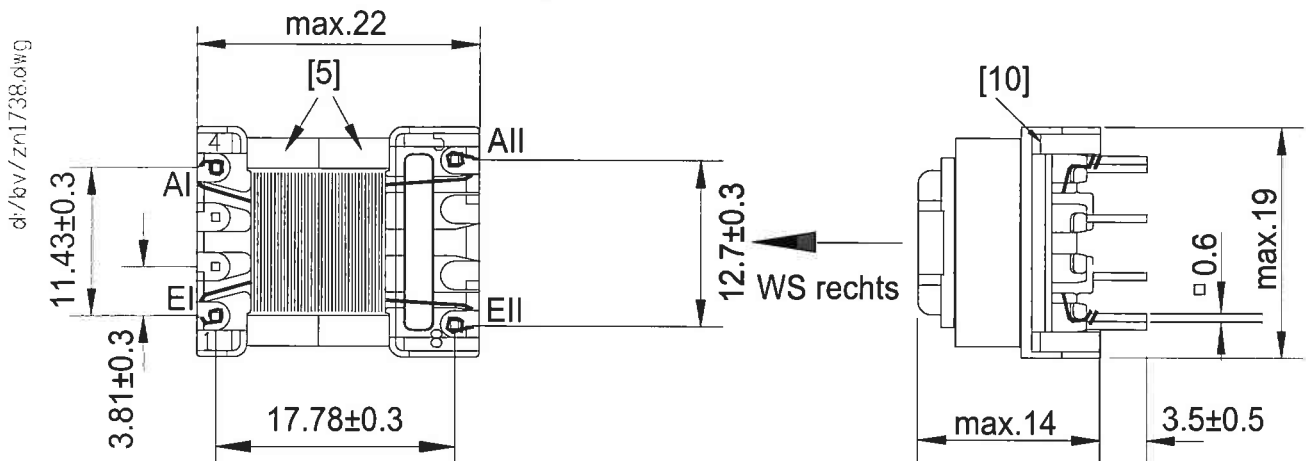


# Technical Data Sheet

 Customer:  
**Kaschke Gö**

 Part designation:  
**SP-E 16/5**

 Customer part no.:  
**SNK-15-3**


Core / material / air gap / AL	<b>E 16/5 K2006 or equiv.</b>	
Nominal inductance	<b>LI = 2,8 mH ± 15%</b>	
maximum transmissible power	<b>3W (50°C)</b>	
Working frequency	<b>44kHz</b>	
Transformation ratio		
dielectric strength (50Hz/2s)	<b>prim-sec:4KV</b>	
Nominal Current		
Design in comp. with standard	<b>EN60950/EN61558</b>	
Working / storage temperature	<b>-25°C- +115°C</b>	<b>-25°C- +85°C</b>
Miscellaneous	<b>F (DIN 40040)</b>	
switcher	<b>link 500/501-uni</b>	

 Remarks : **creepage min.8mm**

 Measuring device of L: **W&K 3245**

 Measuring conditions of L: **50mV/10kHz/22,5°C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5
LI	mH	3,0	3,0	2,8		

Responsible person:

**Uwe Dickhut**

Date:

**19.10.2006**

Design regulation no:

**093.904**

Index:

**00**
**PLEASE GIVE US YOUR WRITTEN RELEASE**

Date

Signature