


Technical Data Sheet

Customer:
Kaschke Göttingen

Part designation:
SP-E 20/6

Customer part no.:

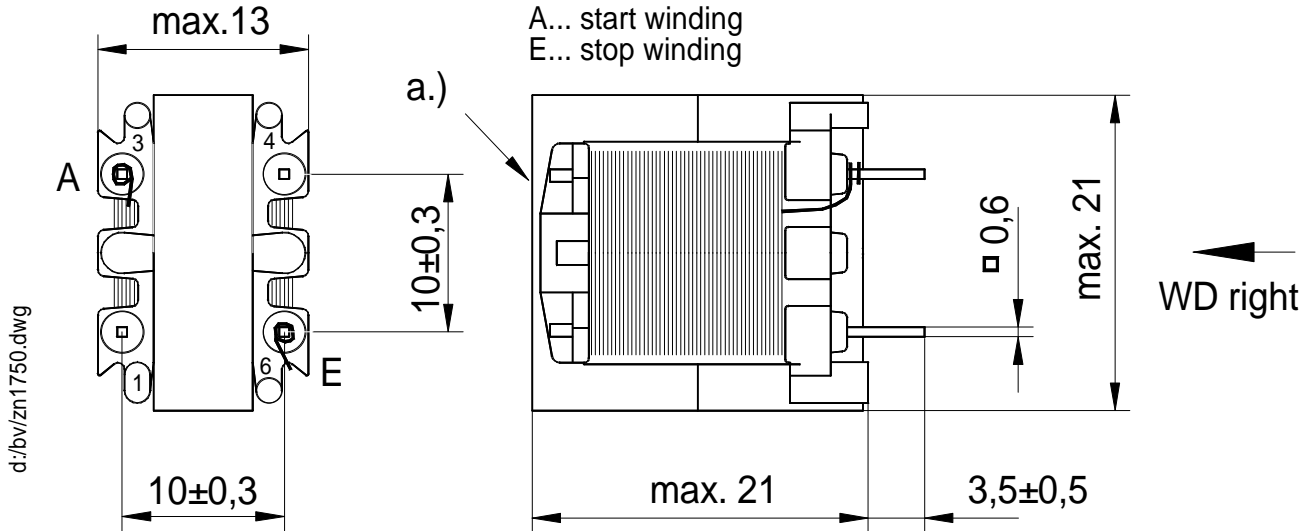

Core / material / air gap / AL	E 20/6 C 75 Ironpowder	
Nominal inductance	L=5,6mH±15%	
maximum transmissible power		
Working frequency		
Transformation ratio		
dielctric strength (50Hz/2s)		
Nominal Current	IN= 0,65A	
Design in comp. with standard	S09	
Working / storage temperature	-25°C- +125°C	-25°C- +85°C
Miscellaneous	F (DIN 40040)	
Rdc	max. 3,3 Ohm	

Remarks : **L@(I=0,5A): 4,7mH; L@(I=0,75A): 4,0mH**
a.) Imprint: KA KW/Jahr 094.912

Measuring device of L: **W&K 3245**

Measuring conditions of L: **50mV/10KHz/24,3°C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person:
Ottmar Pätzold

Date:
19.03.2004

Design regulation no:
094.912

Index:
00

PLEASE GIVE US YOUR WRITTEN RELEASE

Date

Signature