
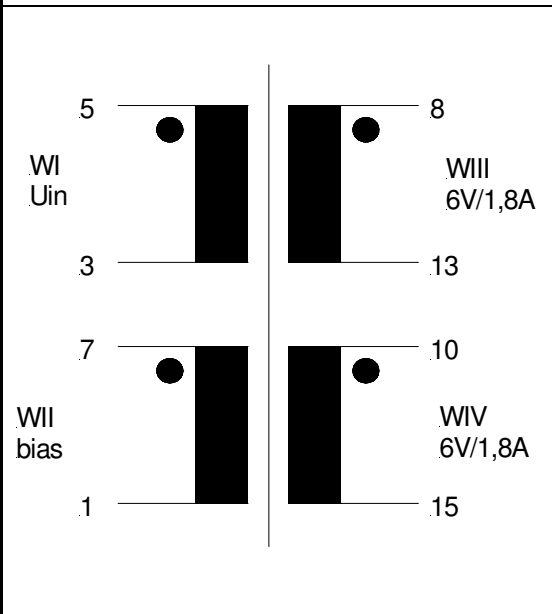


Technical Data Sheet

Customer :
Kaschke Components GmbH

Part designation :
SP-E 20/6

Customer part number :
SKOP243-5-22

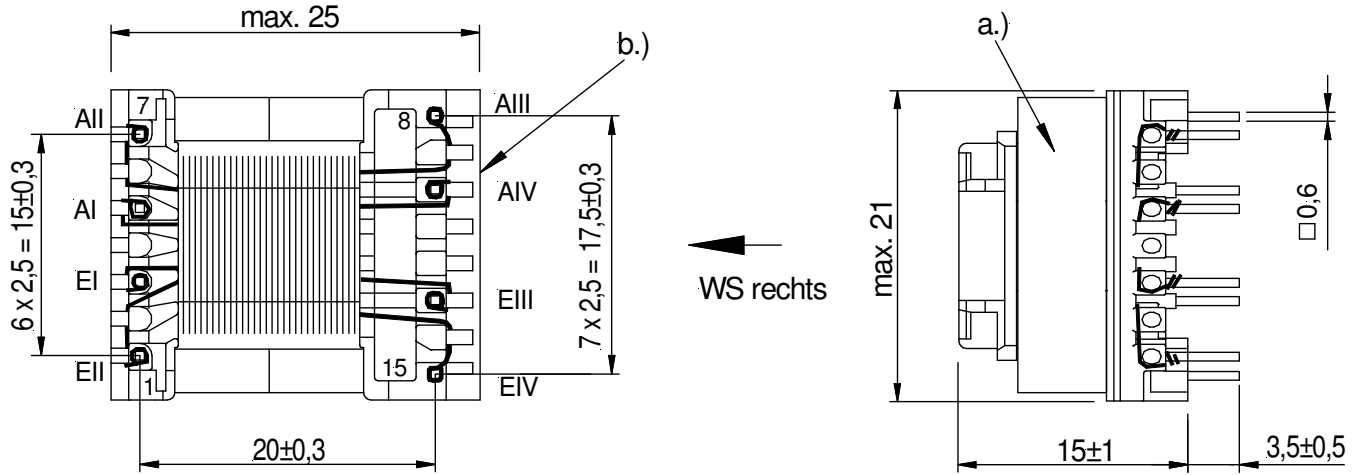

Core / material	E20/6 / K2006 or equiv.
Nominal inductance	LI=0,94mH±10%
Ratio of transformation	79:11:4:4
Dielectric strength (50Hz/1s)	WI/WII - WIII/WIV = 4kVeff
Maximum transmission power	22W (TOP243Y - univ.)
Working frequency	66 - 132 kHz
Design according to standard	EN 61558
Operating temperature	-25°C - +125°C
Storage temperature	-25°C - +85°C
Humidity- / application class	F (DIN 40040)

a.) Kaschke
094931 KW/Jahr

b.) VDE - REG.-Nr. A924

Measuring device of L: WK 3260A			Measuring conditions of L: 50mV/10kHz/25°C			
Measurement	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Kaschke Components GmbH Göttingen	Person responsible : Häpe	Date: 11.04.2013	Design regulation no.: 094931-002
---	-------------------------------------	----------------------------	---

Please give us your written release and certified herewith the confirmation of the validation in the application !!!

Date	Signature
------	-----------