
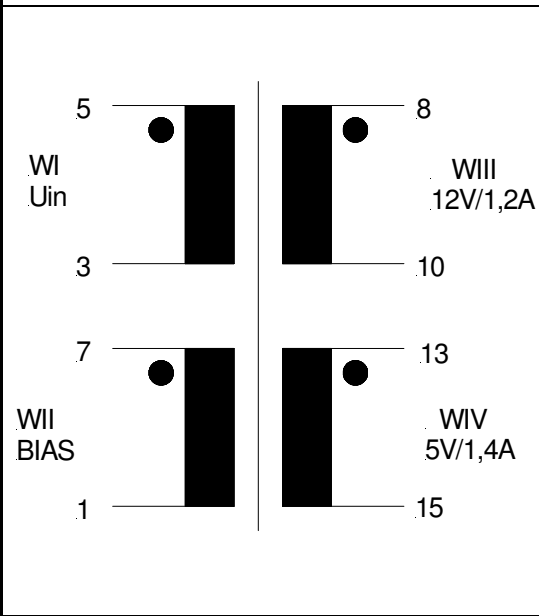


Technical Data Sheet

Customer :
Kaschke Components GmbH

Part designation :
SP-E 20/6

Customer part number :
SKOP243-5-12-22

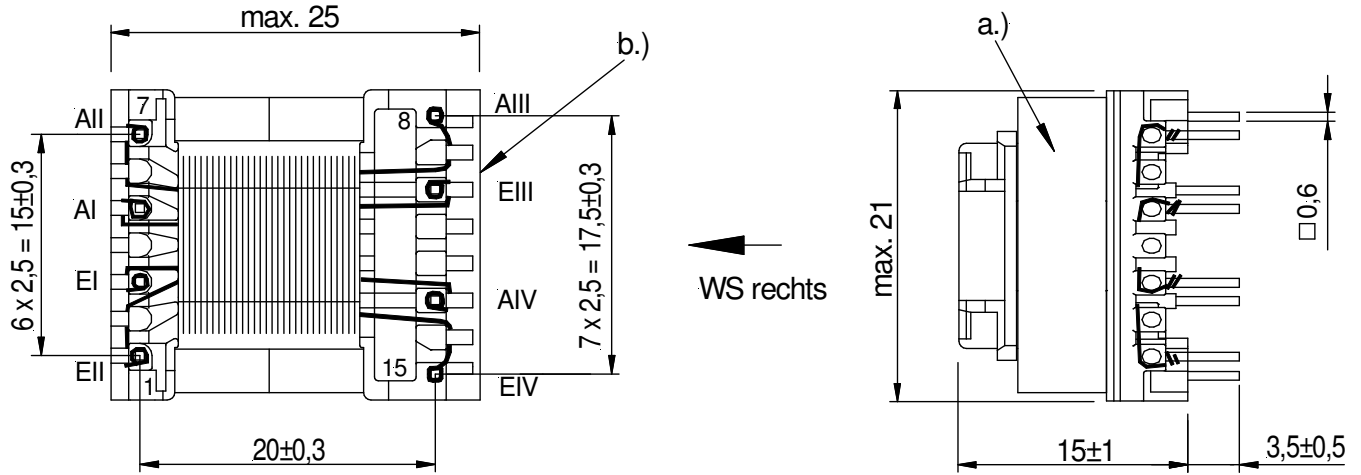

Core / material / air gap	E20/6 / K2006 or equiv. / 0,3mm
Nominal inductance	LI = 940μH±10%
Ratio of transformation	79:10:10:6
Dielectric strength (50Hz/1s)	WI/WII - WIII/WIV = 4kVeff
Maximum transmission power	22W
Working frequency	132kHz
Design according to standard	EN 61558
Operating temperature	-25 - +125
Storage temperature	-25 - +85
Humidity- / application class	F (DIN 40040)

a.) Kaschke
094932 KW/Jahr

b.) VDE - REG.Nr. A924

Measuring device of L: WK 3260A			Measuring conditions of L: 50mV/10kHz/25°C			
Measurement	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Kaschke Components GmbH Göttingen	Person responsible : Häpe	Date: 11.04.2013	Design regulation no.: 094932-002
--	-------------------------------------	----------------------------	---

Please give us your written release and certified herewith the confirmation of the validation in the application !!!

Date	Signature
------	-----------