
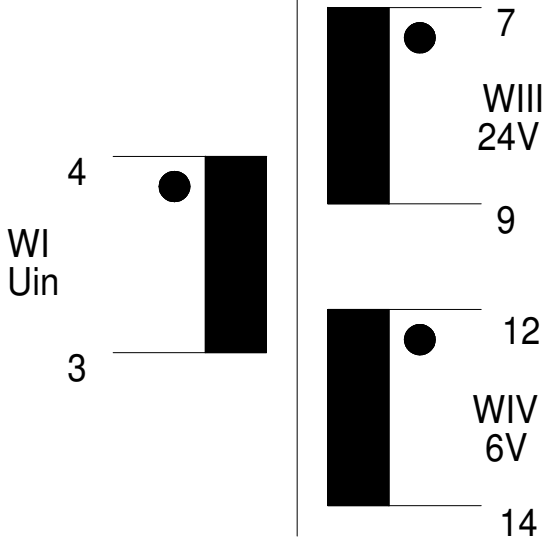


Technical Data Sheet

Customer:
Kaschke Göttingen

Part designation:
SP-E 20/6

Customer part no.:
SKNY268-6-24-14

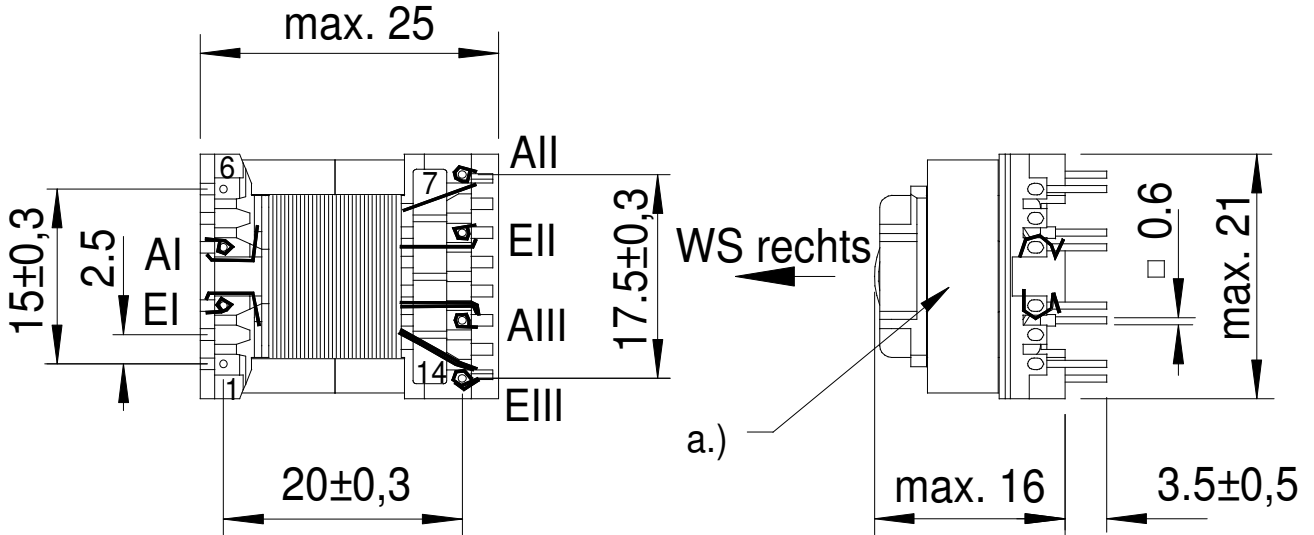

| | | |
|--------------------------------|------------------------------|-------------|
| Core / material / air gap / AL | E20/6 K2006 or equiv m.L.0,2 | |
| Nominal inductance | LI=1,10mH±10% | |
| maximum transmissible power | 19 W | |
| Working frequency | 60...140 kHz | |
| Transformation ratio | 81:15:4 | |
| dielectric strength (50Hz/2s) | WI-WII/WIIV=4kVeff | |
| Nominal Current | | |
| Design in comp. with standard | S98 | |
| Working / storage temperature | -40°C- 125°C | -40°C- 85°C |
| Miscellaneous | | |

Remarks :

Measuring device of L: W&K 3245

Measuring conditions of L: 50 mV/10 KHz

| Measured quantity | Unit | No. 1 | No. 2 | No. 3 | No. 4 | No. 5 |
|-------------------|------|-------|-------|-------|-------|-------|
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Responsible person:
Uwe Dickhut

Date:
22.09.2005

Design regulation no.:
094.942

Index:
00

PLEASE GIVE US YOUR WRITTEN RELEASE

Date

Signature