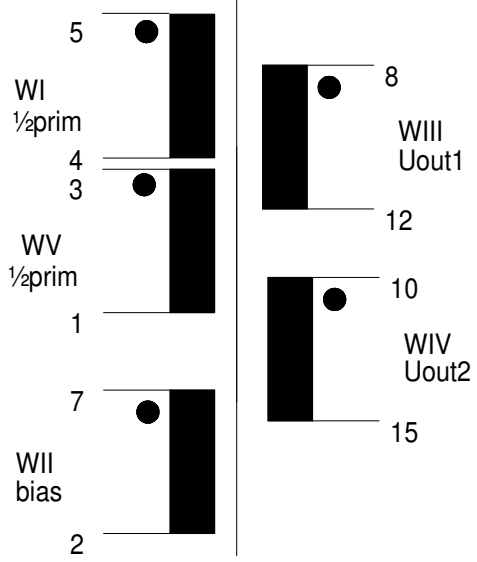
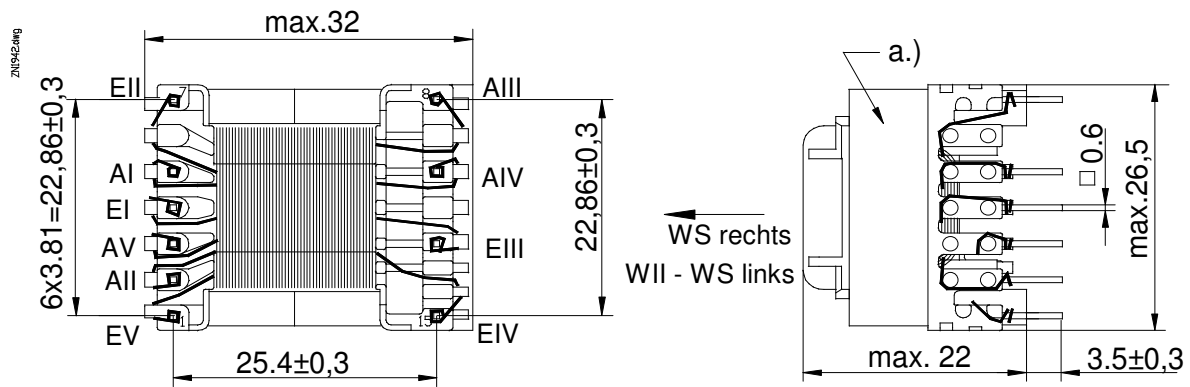


Technical Data Sheet

 Customer:
Kaschke Göttingen

 Part designation:
SP-EF 25

 Customer part no.:
SKOP245-30-45


Core / material / air gap / AL	E25/7 K2006 or equiv.	
Nominal inductance	Lprim = 504 µH ±10%	
maximum transmissible power	45W	
Working frequency	132 kHz	
Transformation ratio	64:7:16:16	
dielctric strength (50Hz/2s)	prim - sec = 3,75kVeff	
Nominal Current		
Design in comp. with standard	EN 61558	
Working / storage temperature	-25 °C- +120 °C	-25 °C- +85 °C
Miscellaneous	F (DIN 40040)	

 Remarks : **a.)marking**
Uout1=Uout2=30V
VOR=100 - 120V

 Measuring device of L: **W&K 3260A** Measuring conditions of L: **50mV/10kHz/25 °C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person: Uwe Dickhut	Date: 06.01.2006	Design regulation no: 095.951	Index: 00
---	----------------------------	---	---------------------

PLEASE GIVE US YOUR WRITTEN RELEASE

<input type="text"/>	<input type="text"/>
Date	Signature