
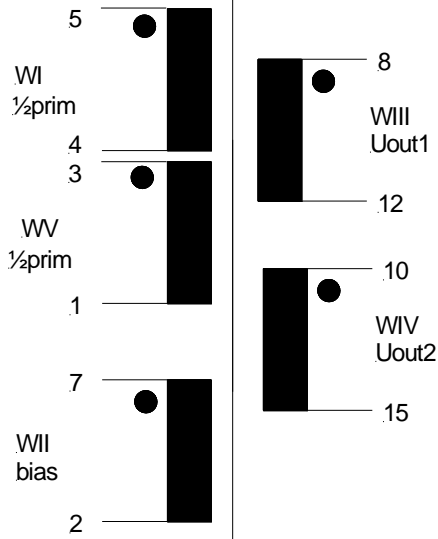


Technical Data Sheet

Customer :
Kaschke Components GmbH & Co

Part designation :
SP-E 25/7

Customer part number :
SKOP244-14-35

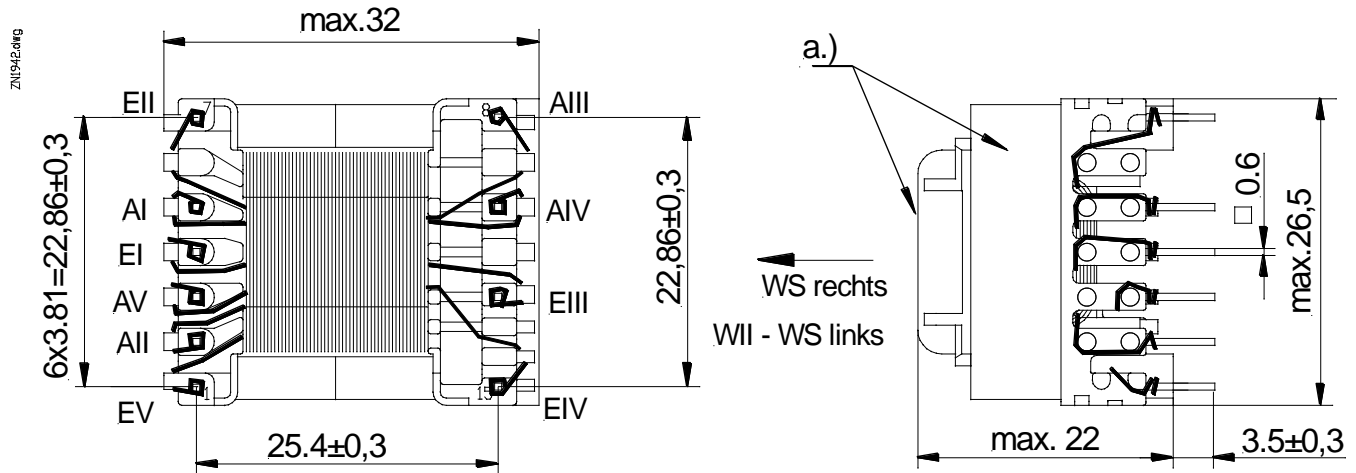

Core / material	E25/7 / K2006 or equiv.
Nominal inductance	LI+LV=504 μ H \pm 10%
Ratio of transformation	32:9:10:10:32
Dielectric strength (50Hz/1s)	WI/WII/WV - WIII/WIV = 3,75kVeff
Maximum transmission power	38W
Working frequency	132kHz
Design according to standard	EN 61558-2-16
Operating temperature	-25°C - +125°C
Storage temperature	-25°C - +85°C

a.) marking

Uout1 = Uout2= 14V-15V

Uout1 + Uout2= 28V-30V

Measuring device of L: WK 3260A			Measuring conditions of L: 50mV/10kHz/25°C			
Measurement	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Kaschke Components GmbH Göttingen	Person responsible :	Date:	Design regulation no.:
	Häpe	01.08.2014	095952-002

Please give us your written release and certified herewith the confirmation of the validation in the application !!!

Date	Signature
------	-----------