




Technical Data Sheet

Customer:
Kaschke Göttingen

Part designation:
SP-E 13/6

Customer part no.:
SLNK363-15-3

d:/bv/znt1864.dwg

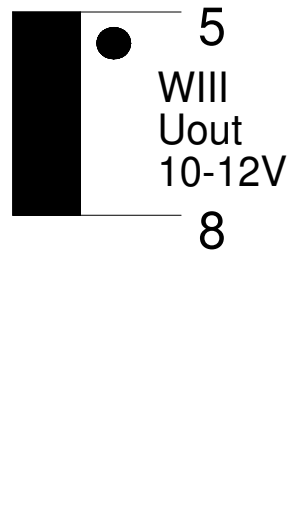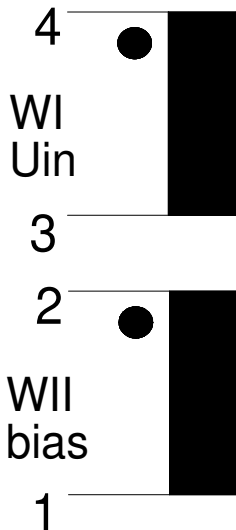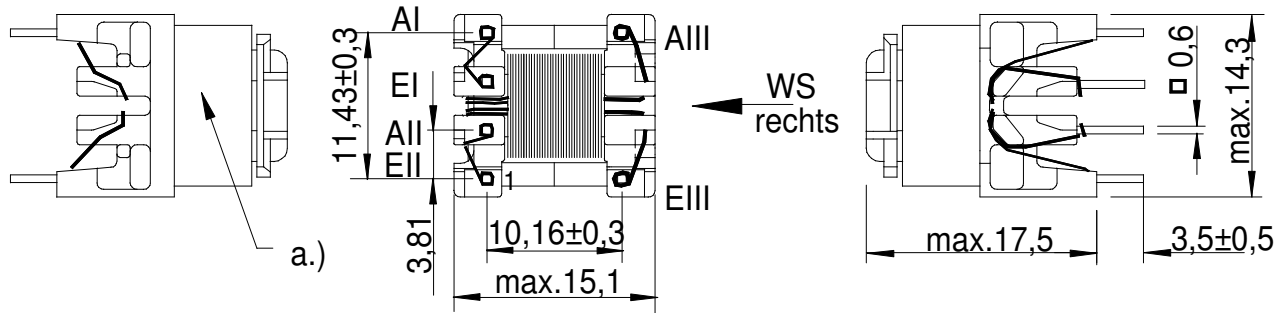

Core / material / air gap / AL	E13/6 K2006 or equiv.	
Nominal inductance	LI= 1,5mH ±10%	
maximum transmissible power	4W	
Working frequency	132KHz	
Transformation ratio	132:19:16	
dielectric strength (50Hz/2s)	Prim - Sec: 3,75KV	
Nominal Current		
Design in comp. with standard	S98	
Working / storage temperature	-25 °C- +120 °C	-25 °C- +85 °C
Miscellaneous		
switcher	Link363-universal	

Remarks : **a.) marking**

Measuring device of L: **W&K 3260A**

Measuring conditions of L: **50mV/10kHz/25 °C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person:

Markus Häpe

Date:

25.10.2007

Design regulation no:

096.841

Index:

00

PLEASE GIVE US YOUR WRITTEN RELEASE

Date

Signature