
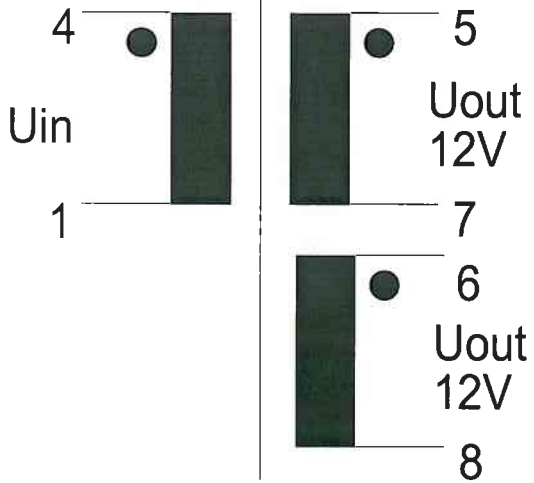


Technical Data Sheet

Customer:
Kaschke Göttingen

Part designation:
SP-E 13/6

Customer part no.:
SNK500-2x12-3

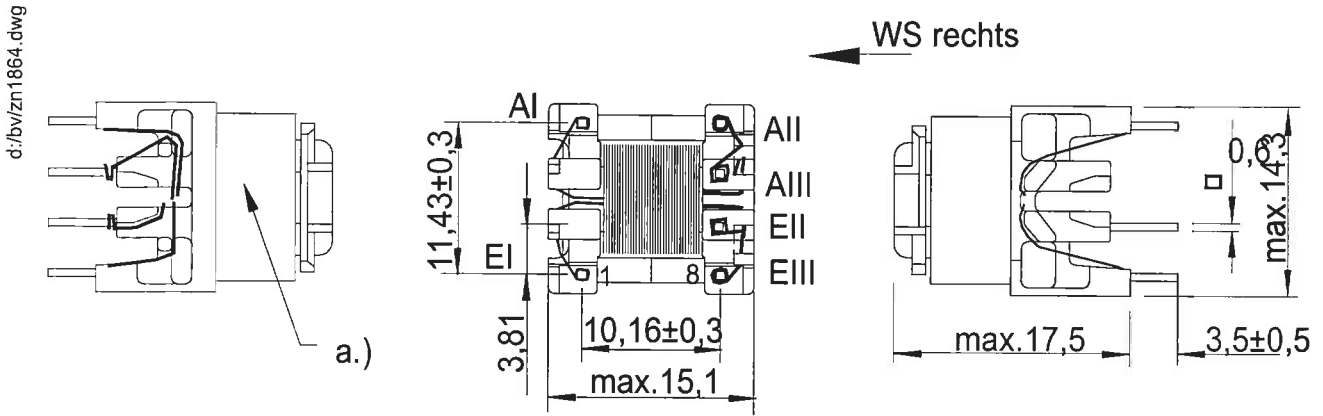

Core / material / air gap / AL	E13/6 K2006 or equiv.	
Nominal inductance	LI= 2,62mH ±10%	
maximum transmissible power	3W (50°C)	
Working frequency	44kHz	
Transformation ratio	109:26:26	
dielectric strength (50Hz/2s)	prim-sec:3,75KV	
Nominal Current		
Design in comp. with standard	S08	
Working / storage temperature	-25°C- 120°C	-25°C- 85°C
Miscellaneous	F (DIN 40040)	
switcher	link 500/501-uni	

Remarks : **creepage min.6mm**

Measuring device of L: **W&K 3260A**

Measuring conditions of L: **50 mV/10 KHz/25°C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person:

Uwe Dickhut

Date:

07.01.2005

Design regulation no:

096.906

Index:

00

PLEASE GIVE US YOUR WRITTEN RELEASE

Date

Signature