
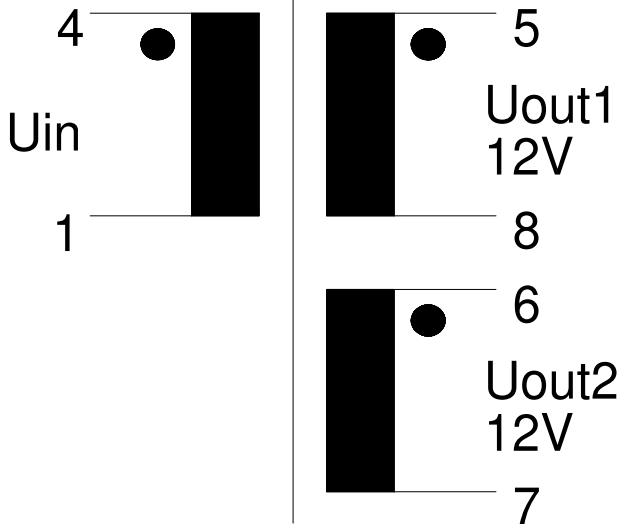


# Technical Data Sheet

Customer:  
**AZZURRI**

Part designation:  
**SP-E13/6 (LF)**

Customer part no.:  
**SKNY264-12-3**

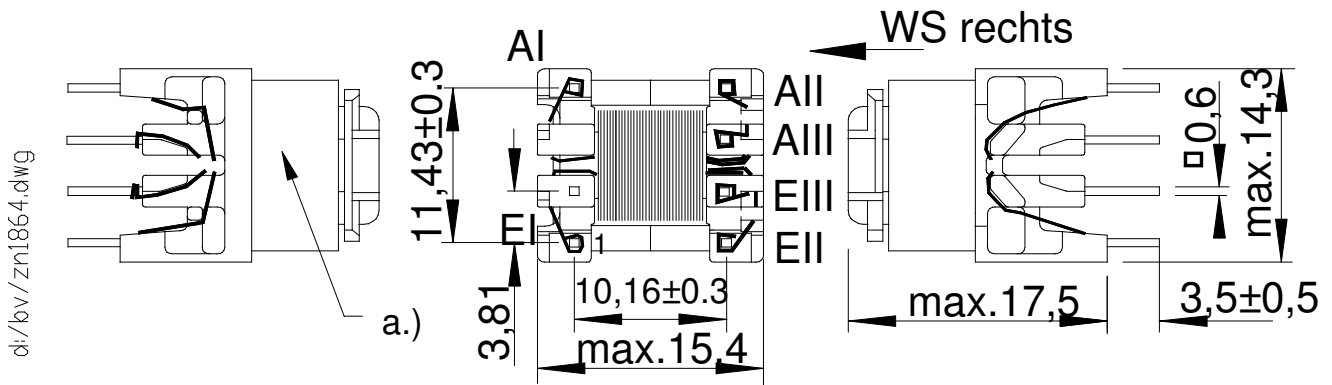

Core / material / air gap / AL	<b>E13/6 K2006 or equiv.</b>	
Nominal inductance	<b>LI= 1,18 mH ±15%</b>	
maximum transmissible power	<b>3W</b>	
Working frequency	<b>132kHz</b>	
Transformation ratio	<b>73:16:16</b>	
dielectric strength (50Hz/2s)	<b>WI-WII/WIII: 3,75KV</b>	
Nominal Current		
Design in comp. with standard	<b>S08</b>	
Working / storage temperature	<b>-25°C- 120°C</b>	<b>-25°C- 85°C</b>
Miscellaneous		

Remarks : **a.) Aufdruck (Marking)**

Measuring device of L: **W&K 3245**

Measuring conditions of L: **50 mV/10 KHz**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5
LI	mH					
LII	µH					
LIII	µH					
LS	µH					

Responsible person:

**Uwe Dickhut**

Date:

**30.11.2004**

Design regulation no:

**096.922**

Index:

**00**

**PLEASE GIVE US YOUR WRITTEN RELEASE**

Date

Signature