



# Technical Data Sheet

Customer:  
**Kaschke Göttingen**

Part designation:  
**SP-E 13/6**

Customer part no.:  
**STNY264-12-3**

d:/bv/zn1864.dwg

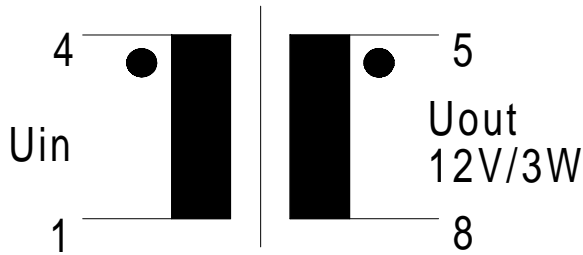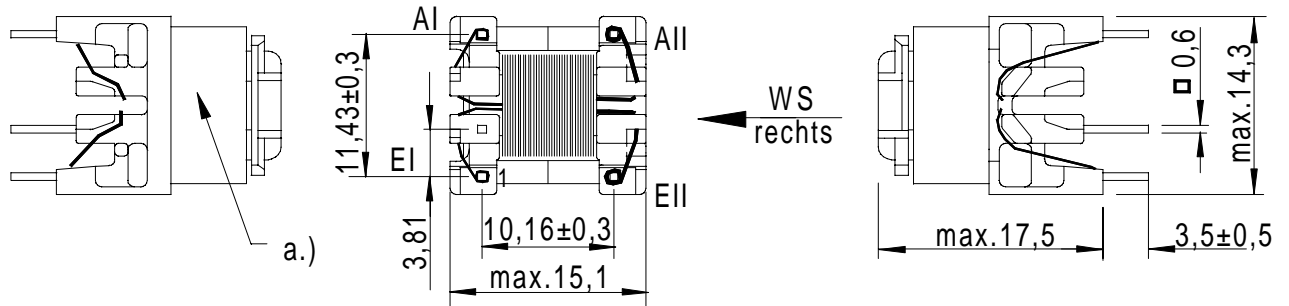

Core / material / air gap / AL	<b>E13/6 K2006 or equiv.</b>	
Nominal inductance	<b>LI= 1,4mH ±15%</b>	
maximum transmissible power	<b>3W(TNY263/4-uni)</b>	
Working frequency	<b>132kHz</b>	
Transformation ratio	<b>96 : 9</b>	
dielctric strength (50Hz/2s)	<b>WI-WII: 3,75kV</b>	
Nominal Current		
Design in comp. with standard	<b>EN60950/EN61558-1</b>	
Working / storage temperature	<b>-25°C- +120°C</b>	<b>-25°C- +85°C</b>
Miscellaneous	<b>F(DIN 40040)</b>	
leakage inductance	<b>max. 55µH</b>	

Remarks : **a.) marking**  
- creepage min. 6mm

Measuring device of L: **W&K 3260A**

Measuring conditions of L: **50mV/10kHz/22,5°C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person:  
**Uwe Dickhut**

Date:  
**01.03.2007**

Design regulation no.:  
**096.931**

Index:  
**01**

**PLEASE GIVE US YOUR WRITTEN RELEASE**

Date

Signature