





Technical Data Sheet

Customer:
Kaschke Göttingen

Part designation:
SP-E 13/6

Customer part no.:
SLNK363-12-4

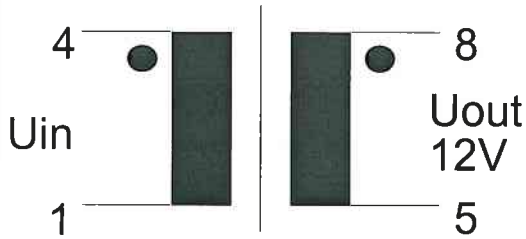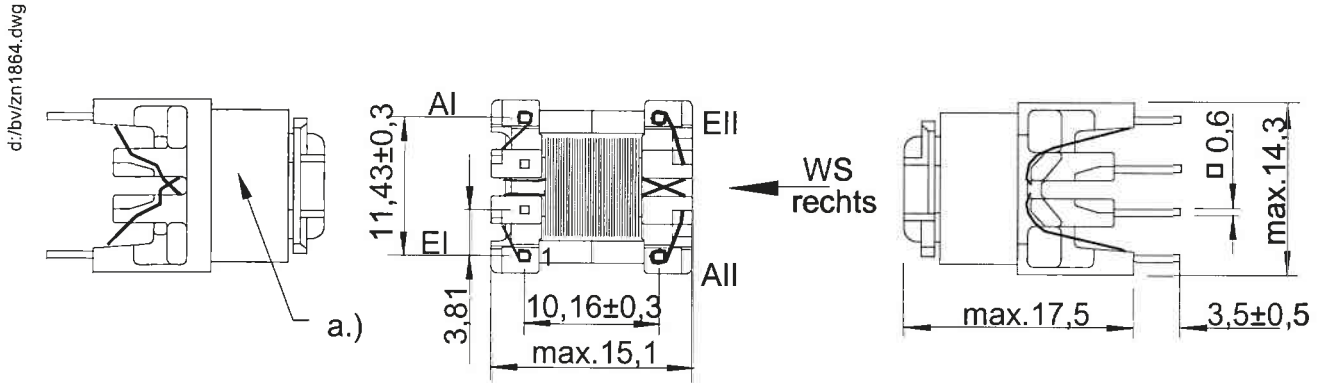

Core / material / air gap / AL	E13/6 K2006 or equiv.	
Nominal inductance	LI= 2,4mH ±15%	
maximum transmissible power	4W	
Working frequency	min. 124KHz	
Transformation ratio	167:17	
dielctric strength (50Hz/2s)	Prim - Sec: 3,75KV	
Nominal Current		
Design in comp. with standard	.	
Working / storage temperature	-25°C- +120°C	-25°C- +85°C
Miscellaneous	F(DIN40 040)	

Remarks : a.) marking

Measuring device of L: **W&K 3260A**

Measuring conditions of L: **50mV/10kHz/25°C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person: **Markus Häpe** Date: **21.04.2008** Design regulation no: **096.941** Index: **00**

PLEASE GIVE US YOUR WRITTEN RELEASE Date Signature