



Technical Data Sheet

Customer:
Kaschke Gö

Part designation:
SP-E 13/6

Customer part no.:
SLNK520-12-3

d:/bv/znt1864.dwg

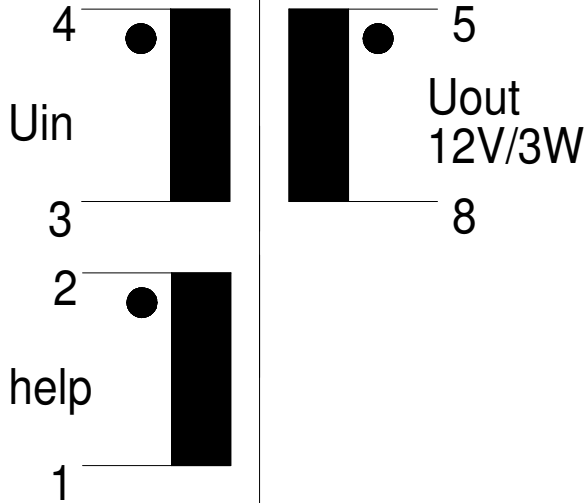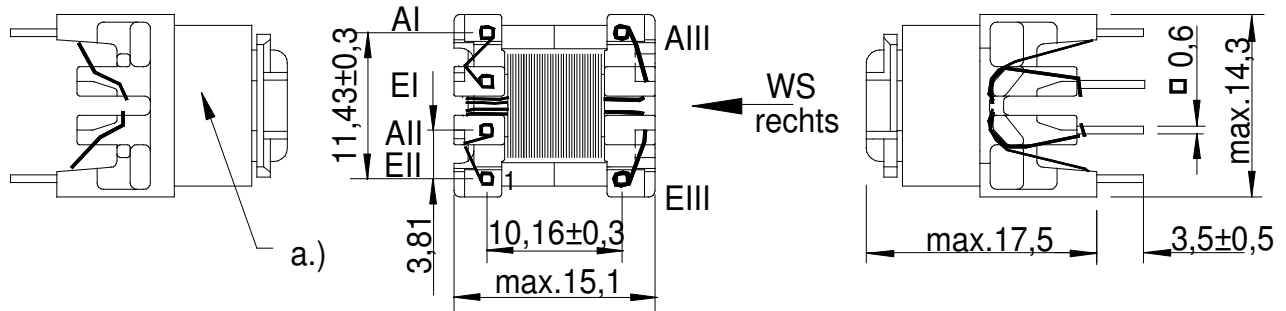

Core / material / air gap / AL	E13/6 K2006 or equiv.	
Nominal inductance	LI= 3,4mH ±15%	
maximum transmissible power	3W	
Working frequency	44KHz	
Transformation ratio	146:33:24	
dielectric strength (50Hz/2s)	Prim - Sec: 3,75KV	
Nominal Current		
Design in comp. with standard	S98	
Working / storage temperature	-25°C- +120°C	-25°C- +85°C
Miscellaneous		
Lleak	max.120µH	

Remarks : a.) marking

Measuring device of L: **W&K 3260A**

Measuring conditions of L: **50mV/10kHz/25°C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person:

Uwe Dickhut

Date:

27.09.2006

Design regulation no:

096.951

Index:

00

PLEASE GIVE US YOUR WRITTEN RELEASE

Date

Signature