
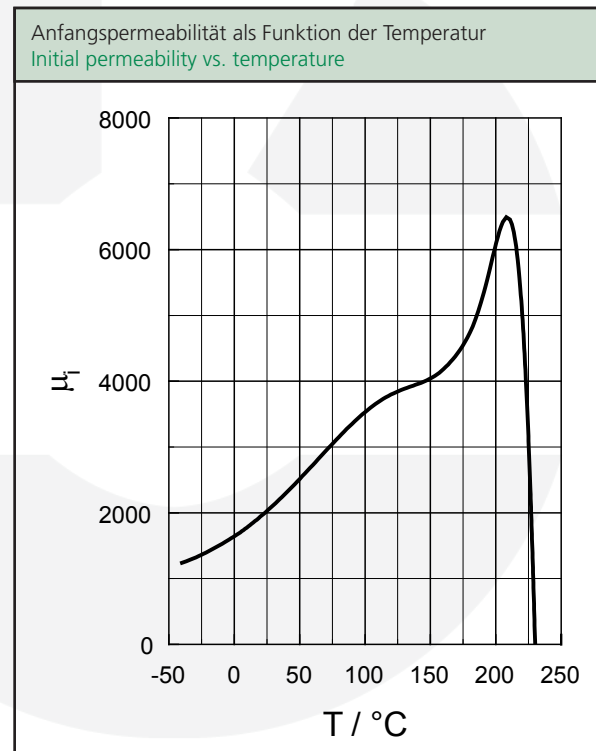






	Symbol / symbol	Wert / value	Einheit / unit
Anfangspermeabilität / initial permeability	μ_i	2100 \pm 25%	-
Flussdichte / flux density	B_{max}	\geq 490	mT
bei Feldstärke / at field strength	H_{max}	800	A/m
Remanenz / remanence	B_r	\geq 200	mT
Koerzitivfeldstärke / coercive force	H_c	\leq 25	A/m
Curie-Temperatur / Curie temperature	T_c	\geq 200	$^{\circ}$ C
Bez. Temperaturbeiwert / rel. temperature coefficient	α_r		10^{-6} /K
bei / at -25 $^{\circ}$ C ... +25 $^{\circ}$ C		\leq 3,5	
+25 $^{\circ}$ C ... +70 $^{\circ}$ C		\leq 4	
Spez. Verlustleistung (typische Werte) spec. power losses (typical values)	P_v		mW/cm ³
bei / at 50kHz, 200mT, 100 $^{\circ}$ C		180	
100kHz, 200mT, 100 $^{\circ}$ C		450	
200kHz, 100mT, 100 $^{\circ}$ C		190	
Gleichstromwiderstand / resistivity	ρ	\geq 1	Ω m
Sinterrohddichte / sintered density	γ	\approx 4,8	g/cm ³

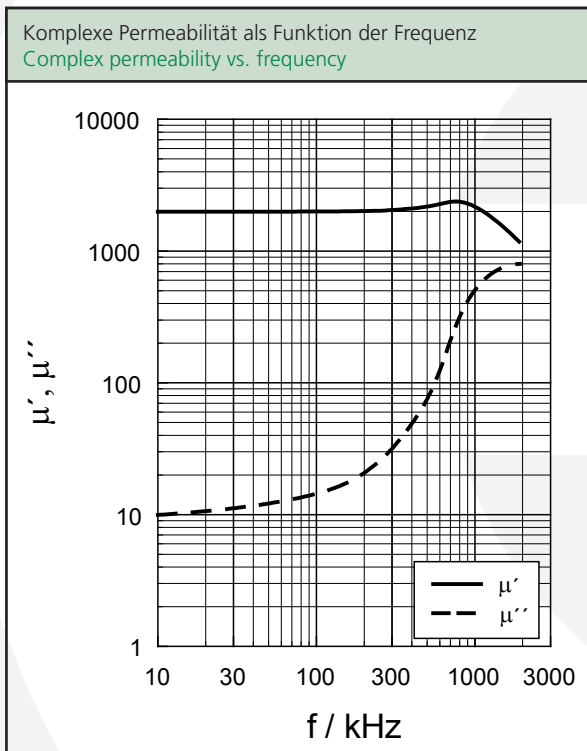

All information given without liability. If you require further information about our products, do not hesitate to contact our representatives, or visit our homepage, www.kaschke.de.

Kaschke Components GmbH

Rudolf-Winkel-Straße 6 · 37079 Göttingen · Germany
Fon +49 (0) 5 51-50 58-6 · Fax +49 (0) 5 51-65 75 6
kaschke.de

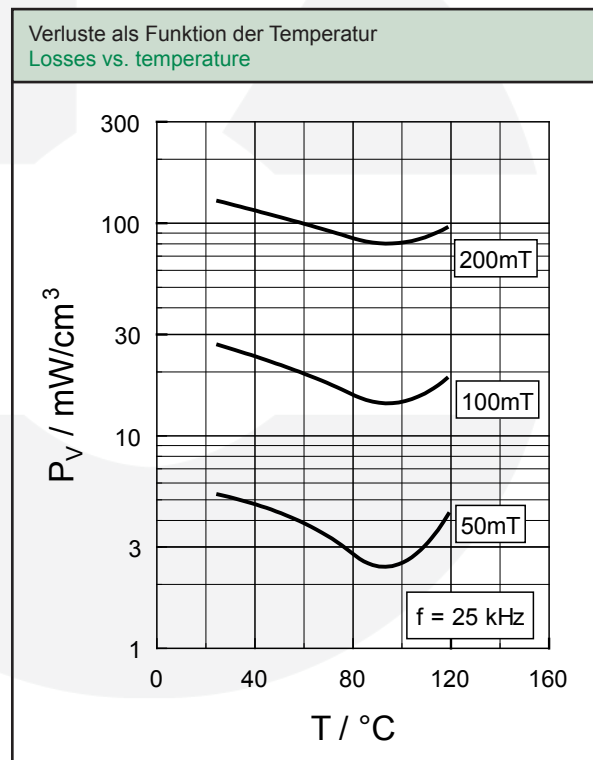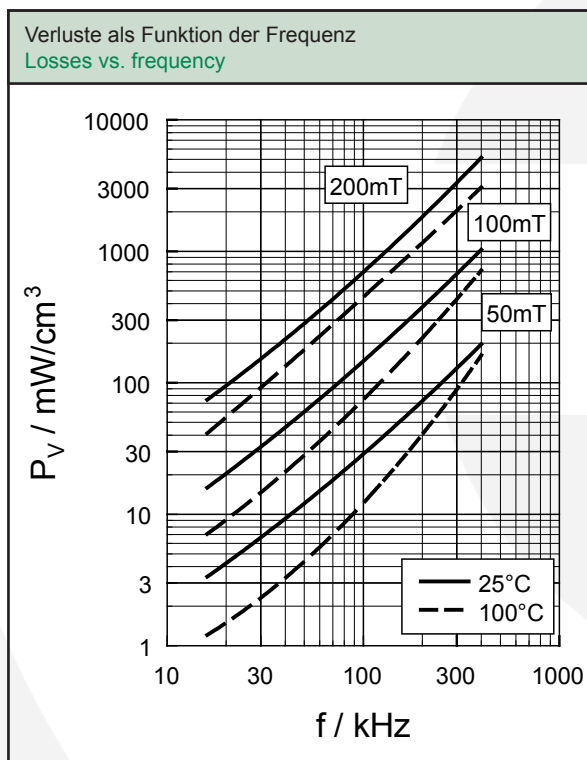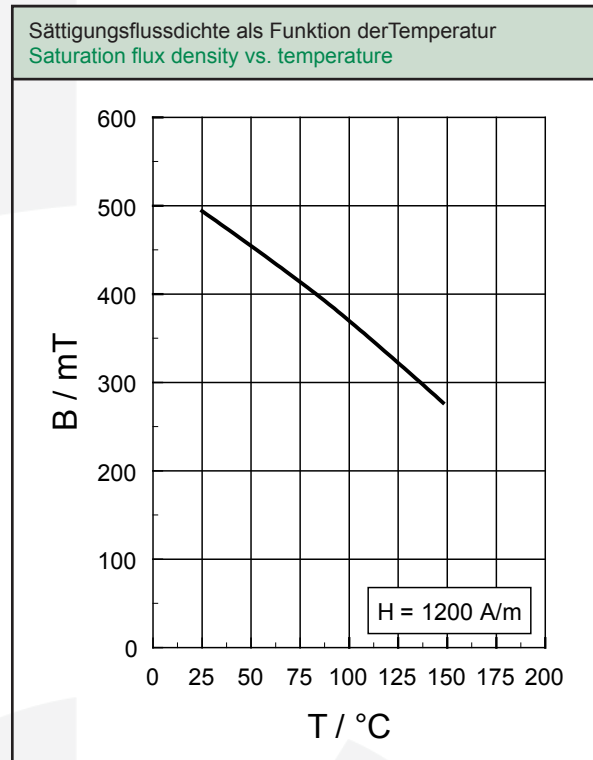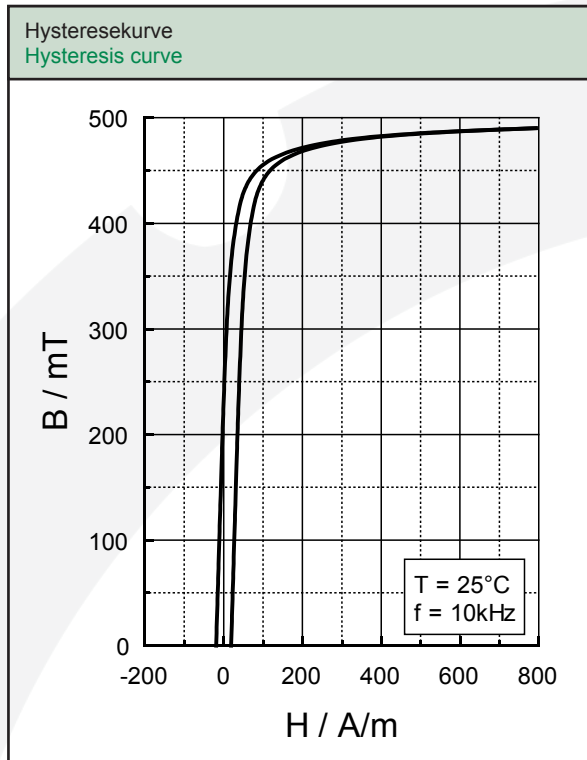

All information given without liability. If you require further information about our products, do not hesitate to contact our representatives, or visit our homepage, www.kaschke.de.

Kaschke Components GmbH

Rudolf-Winkel-Straße 6 · 37079 Göttingen · Germany
Fon +49 (0) 5 51-50 58-6 · Fax +49 (0) 5 51-65 75 6
kaschke.de