


Ringkern R 21,5/10,3/7,5
Ring core R 21.5/10.3/7.5

Magn. Formkenngrößen
eff. magn. parameters

Formfaktor <i>core factor</i>	$C_1 =$	1,20 mm ⁻¹
Eff. magn. Weglänge <i>eff. magn. path length</i>	$l_e =$	45,9 mm
Eff. magn. Querschnitt <i>eff. magn. cross section</i>	$A_e =$	38,2 mm ²
Eff. magn. Volumen <i>eff. magn. volume</i>	$V_e =$	1750 mm ³
Gewicht <i>weight</i>	$G \approx$	8,5 g

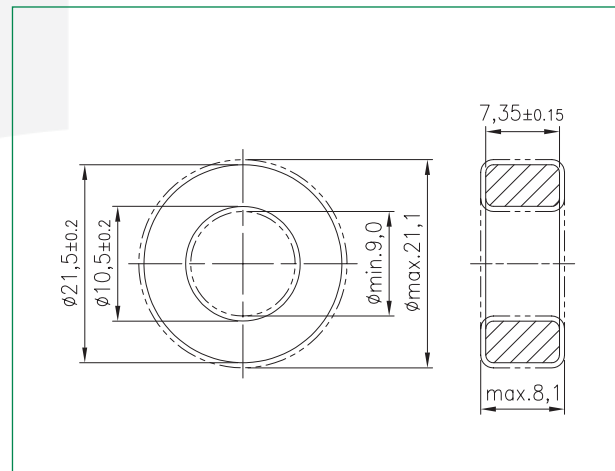

Werkstoff material	A _L -Wert A _L value nH	Toleranz tolerance		Bestellnummer order number ^{*)}
		unbeschichtet <i>uncoated</i>	beschichtet <i>coated</i>	
K 2006	2200	± 25%	± 25%	xxx 211075 026
K 4000	4150	± 25%	± 25%	xxx 211075 004
K 5500	5750	± 25%	± 25%	xxx 211075 055
K 6000	6250	± 25%	± 30%	xxx 211075 006
K 7000	6850	± 25%	± 30%	xxx 211075 007

^{*)} xxx steht für / *xxx stands for* 317: Epoxylackbeschichtung / *epoxy lacquer coating*
 318: unbeschichtet / *uncoated*

Weitere Materialien und Höhen auf Anfrage / *further materials and heights on request*

All information given without liability. If you require further information about our products, do not hesitate to contact our representatives, or visit our homepage, www.kaschke.de.

Kaschke Components GmbH

Rudolf-Winkel-Straße 6 · 37079 Göttingen · Germany
 Fon +49 (0) 5 51-50 58-6 · Fax +49 (0) 5 51-65 75 6
kaschke.de